



## THERMAL DIFFUSION EFFECT OF FREE CONVECTION MASS TRANSFER FLOW PAST A UNIFORMLY ACCELERATED POROUS PLATE WITH HEAT SINK

Sanjib Sengupta\*

Department of Mathematics, Assam University, Silchar-788011, Assam, India

E-mail : [sanjib\\_aus2009@rediffmail.com](mailto:sanjib_aus2009@rediffmail.com)

(Received on: 31-07-11; Accepted on: 11-08-11)

---

### ABSTRACT

*This paper deals with the combined effect of thermal diffusion and heat absorption on the free convection mass transfer flow of a viscous incompressible fluid past a continuously moving infinite porous plate. Closed form of solution for the velocity field, the temperature field and the concentration field are obtained and discussed graphically for various values of the physical parameters present. In addition, expressions for the viscous drag, Nusselt number and Sherwood number are also derived and finally discussed with the help of tables and graphs.*

**Keywords:** Free convection, Mass transfer, Heat Sink, Thermal diffusion.

**AMS Subject Classification:** 76R10, 80A20.

**Short Title:** Thermal Diffusion effect on free convection mass transfer flow.

---

### 1. INTRODUCTION:

In heat transfer processes, the temperature distribution in a medium is controlled by three distinct modes of heat transfer. Of them convection is a mode of heat transfer that occurs between two mediums which are in relative motion and if the relative motion is set up by buoyancy effects, resulting from density differences, caused by temperature differences in the medium, the convection heat transfer will be called a free or natural convection heat transfer. Extensive studies have been conducted on this type of heat transfer flow by various authors of them Soundalgekar[11], Martynenko et al.[6], Perdakis and Takhar [7], are worth mentioning. Like heat transfer, mass transfer considerations are also very important in modern engineering designs particularly in Chemical engineering. The theory of mass transfer considered as the mass transition occur due to a species concentration difference in a mixture and is used in many areas like the working system in home humidifier, evaporation of liquid refrigerant etc, biological applications like oxygenation of blood, food and drug assimilation, respiration mechanism and in many more fields. Researchers like Raptis and Kafoussias [ 9], Rahman and Sattar [8], Yih [12] are some of the notabale contributors in combined heat and mass transfer phenomena.

In the above mentioned studies the effect of heat absorption and thermal diffusion effects got little attention by the researchers. Chamkha[3] studied the effect of heat generation/absorption in MHD flow of uniformly stretched vertical permeable surface in presence of chemical reaction. It is found that a mass flux can be generated by temperature gradient also, known as Soret effect or thermal-diffusion effect. The Soret effect for instance has been utilized for isotope separation and in mixtures between gases with very light molecular weight like ( $H_2$ , He). In particular, researchers like Durusunkaya and Worek [4], Kafousias and Williams [5], Afify[1], investigated Soret effect on MHD flow. Recently, Renuka et al. [10] have studied the Soret effect on unsteady MHD free convective mass transfer flow past an infinite vertical porous plate with variable suction. Of late Ahmed and Sengupta [2] have investigated the Soret and Dufour effects in steady MHD three – dimensional flow past an infinite porous plate in presence of thermal radiation.

---

**\*Corresponding author: Sanjib Sengupta\*, \*E-mail: [sanjib\\_aus2009@rediffmail.com](mailto:sanjib_aus2009@rediffmail.com)**

The objective of the present study is to investigate the effects of thermal diffusion and heat absorption on two-dimensional free convection mass transfer flow past a uniformly accelerated infinite vertical porous plate, where the effects of thermal radiation and chemical reactions are neglected.

## 2. MATHEMATICAL FORMULATION AND SOLUTION OF THE PROBLEM:

We consider a steady laminar flow of a viscous incompressible fluid past an infinite vertical porous flat plate. Introduce a co-ordinate system  $(\bar{x}, \bar{y})$  with  $\bar{x}$ -axis along the length of the plate in the upward vertical direction and  $\bar{y}$ -axis normal to the plate towards the fluid region. The plate is subjected to a constant suction parallel to  $\bar{y}$ -axis. The viscous dissipations of energy are assumed to be negligible for the study. Since, the plate is infinite in length all the fluid property except possibly the pressure remain constant along the  $\bar{x}$ -direction. The fluid property variation with temperature is limited to density variation only and the influence of variation of density with temperature is restricted to the body force term only, in accordance with the Boussinesq approximation. Under boundary layer and Boussinesq approximations, the equations governing the steady laminar two-dimensional free convective flow with medium concentration in presence of Soret and heat absorption effects reduce to:

### Continuity Equation:

$$\frac{\partial \bar{v}}{\partial \bar{y}} = 0 \quad (1)$$

### Momentum Equation:

$$\bar{v} \frac{\partial \bar{u}}{\partial \bar{y}} = \nu \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} + g\beta(\bar{T} - \bar{T}_\infty) + g\beta^*(\bar{C} - \bar{C}_\infty) \quad (2)$$

### Energy Equation:

$$\bar{v} \frac{\partial \bar{T}}{\partial \bar{y}} = \frac{k}{\rho c_p} \frac{\partial^2 \bar{T}}{\partial \bar{y}^2} + \frac{Q_0}{\rho c_p} (\bar{T}_\infty - \bar{T}) \quad (3)$$

### Species Continuity Equation:

$$\bar{v} \frac{\partial \bar{C}}{\partial \bar{y}} = D_M \frac{\partial^2 \bar{C}}{\partial \bar{y}^2} + D_T \frac{\partial^2 \bar{T}}{\partial \bar{y}^2} \quad (4)$$

The relevant boundary conditions are:

$$\bar{y}=0: \bar{u} = \bar{U}, \bar{v} = -V_0, (V_0 > 0), \bar{T} = \bar{T}_w, \bar{C} = \bar{C}_w$$

$$\bar{y} \rightarrow \infty: \bar{u} \rightarrow 0, \bar{v} \rightarrow -V_0, \bar{T} \rightarrow \bar{T}_\infty, \bar{C} \rightarrow \bar{C}_\infty$$

We introduce the following non-dimensional quantities as:

$$y = \frac{V_0 \bar{y}}{\nu}, u = \frac{\bar{u}}{V_0}, U_0 = \frac{\bar{U}}{V_0}, v = \frac{\bar{v}}{V_0},$$

$$\theta = \frac{\bar{T} - \bar{T}_\infty}{\bar{T}_w - \bar{T}_\infty}, \phi = \frac{\bar{C} - \bar{C}_\infty}{\bar{C}_w - \bar{C}_\infty}, \text{Pr} = \frac{\nu c_p}{k}, \text{Sc} = \frac{\nu}{D_M},$$

$$S_r = \frac{D_T(\bar{T}_w - \bar{T}_\infty)}{\nu(\bar{C}_w - \bar{C}_\infty)}, G_r = \frac{g\beta\nu(\bar{T}_w - \bar{T}_\infty)}{V_0^3}, G_m = \frac{g\beta^*\nu(\bar{C}_w - \bar{C}_\infty)}{V_0^3}, Q = \frac{Q_0\nu^2}{kV_0^2}, (Q_0 > 0)$$

The non-dimensional forms of equations are:

$$\frac{dv}{dy} = 0 \quad (5)$$

$$\frac{d^2u}{dy^2} + \frac{du}{dy} = -Gr\theta - G_m\phi \quad (6)$$

$$\frac{d^2\theta}{dy^2} + Pr \frac{d\theta}{dy} - Q\theta = 0 \quad (7)$$

$$\frac{d^2\phi}{dy^2} + Sc \frac{d\phi}{dy} = -ScSr \frac{d^2\theta}{dy^2} \quad (8)$$

The corresponding non-dimensional boundary conditions are:

$$y=0 : u = U_0, v = -1, \theta = 1, \phi = 1$$

$$y \rightarrow \infty : u \rightarrow 0, v \rightarrow -1, \theta \rightarrow 0, \phi \rightarrow 0.$$

The solutions of (6), (7), and (8) are,

$$u(y) = A_5 e^{-Scy} + A_7 e^{-A_1 y} - A_8 e^{-y} + U_0 e^{-y} \quad (9)$$

$$\theta(y) = e^{-A_1 y} \quad (10)$$

$$\phi(y) = A_3 e^{-Scy} + A_2 e^{-A_1 y} \quad (11)$$

$$\text{Where, } A_1 = \frac{Pr + \sqrt{Pr^2 + 4Q}}{2},$$

$$A_2 = \frac{ScSrA_1}{Sc - A_1}, (Sc \neq A_1),$$

$$A_3 = 1 - A_2, A_4 = \frac{Gr}{A_1(1 - A_1)}, (A_1 \neq 1),$$

$$A_5 = \frac{GmA_3}{Sc(1 - Sc)}, A_6 = \frac{GmA_2}{A_1(1 - A_1)},$$

$$(Sc \neq 0, Sc \neq 1),$$

$$A_7 = A_4 + A_6, A_8 = A_5 + A_7.$$

#### **Skin Friction at the plate:**

The non-dimensional skin friction at the plate is:

$$\tau = \left( \frac{\partial u}{\partial y} \right)_{y=0} = A_8 - A_1 A_7 - A_5 Sc - U_0 \quad (12)$$

### Rate of Heat Transfer Co-efficient:

The non-dimensional heat transfer co-efficient at the plate is:

$$Nu = \frac{A_1}{Pr} \quad (13)$$

### Rate of Mass Transfer Co-efficient:

The non-dimensional mass transfer co-efficient at the plate is:

$$Sh = \frac{1}{Sc} (A_1 A_2 + A_3 Sc) \quad (14)$$

## 3. RESULTS AND DISCUSSION:

During the course of discussion of the effects of various parameters on the flow field, the following considerations are made:

- (1) The value of the Prandtl number  $Pr$  are taken as .71 and 7, which corresponds physically to air and water.
- (2) The value of the Schmidt number  $Sc$  is chosen at 0.22, 0.66, 0.96, which represents hydrogen, water vapour and carbon dioxide at 25°C and 1 atm.
- (3) The values of the Grashof number  $G_r$ , modified Grashof number  $G_m$ , plate velocity  $U_0$  are taken to be fixed at 4, 1, 1 respectively.
- (4) Finally the values of the Soret number  $Sr$ , heat sink parameter  $Q$ , are chosen arbitrarily. Under the above assumptions, results are shown in figures 1-3 and in tables 1-2.

Table 1 represents numerically how the skin-friction at the plate has been affected by the presence of Schmidt number  $Sc$  against soret number  $Sr$ . It reflects that the skin-friction  $\tau$  increases (positively) as  $Sc$  increases upto 0.708 and as  $sc \geq 0.709$ ,  $\tau$  decreases and becomes negative.

Table 2 represents numerically the effect of the parameter  $Sc$  on the rate of mass transfer co –efficient quantified by the Sherwood number  $Sh$  against  $Sr$ . It has seen that when  $Sc \leq 0.708$ ,  $Sh$  decreases and becomes negative and for  $Sc \geq 0.709$ ,  $Sh$  increases gradually against  $Sr$ .

The effect of Soret number  $Sr$  on the flow velocity  $u$  against  $y$  is shown in figure 1. It is seen that as the effect of mass buoyancy force near to the plate increases in presence of  $Sr$ , the flow velocity increases sharply due to increase in values of  $Sr$  and decreases steadily far away from the plate.

Figure 2 depicts the changes of the non-dimensional temperature  $\Theta$  due to changes of values of heat absorption parameter  $Q$ . As the thickness of the thermal boundary layer gets reduce by the heat absorption parameter, the value of non-dimensional temperature  $\Theta$  is thus reducing by the heat absorption effect.

The effect of the Soret parameter  $Sr$  on the species concentration  $\phi$  is shown graphically in figure 3. Due to Soret effect the thickness of the concentration boundary layer raises, thereby increases the value of  $\phi$ .

Table 1. Numerical values of non-dimensional skin-friction  $\tau$  for different values of Schmidt number  $Sc$  against arbitrary values of soret number  $Sr$  and for fixed values of  $Pr = 0.71$ ,  $G_r = 4.0$ ,  $G_m = 1.0$ ,  $U_0 = 1.0$ ,  $Q = 1.0$

$Sr$	$Sc = 0.22$	$Sc = 0.708$	$Sc = 0.709$
0.0	6.370	3.237	3.235
0.5	6.983	2474.917	-187.190
1.0	7.595	4946.597	-377.615

1.5	8.208	7418.277	-568.04
2.0	8.821	9889.957	-758.466
2.5	9.434	12361.637	-948.891
3.0	10.046	14833.317	-1139.316
3.5	10.659	17304.997	-1329.741
4.0	11.272	19776.677	-1520.166
4.5	11.884	22248.357	-1710.591
5.0	12.497	24720.037	-1901.017

Table 2. Numerical values of non-dimensional rate of mass transfer coefficient  $Sh$  for different values of Schmidt number  $Sc$  against arbitrary values of Soret number  $Sr$  and for fixed values of  $Pr = 0.71$ ,  $G_r = 4.0$ ,  $G_m = 1.0$ ,  $U_0 = 1.0$ ,  $Q = 1.0$ .

$Sr$	$Sc = 0.22$	$Sc = 0.708$	$Sc = 0.709$
0.0	1.000	1.000	1.000
0.5	0.132	-3499.253	270.669
1.0	-0.735	-6999.506	540.339
1.5	-1.603	-10499.759	810.008
2.0	-2.471	-14000.012	1079.677
2.5	-3.338	-17500.265	1349.346
3.0	-4.206	-21000.517	1619.016
3.5	-5.074	-24500.770	1888.685
4.0	-5.941	-28001.023	2158.354
4.5	-6.809	-31501.276	2428.024
5.0	-7.677	-35001.529	2697.693

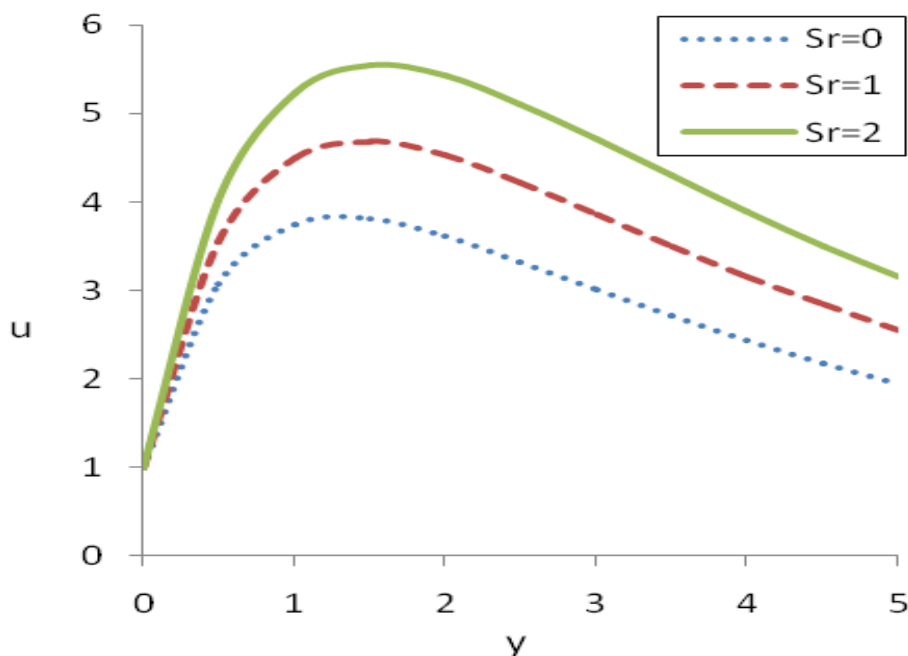
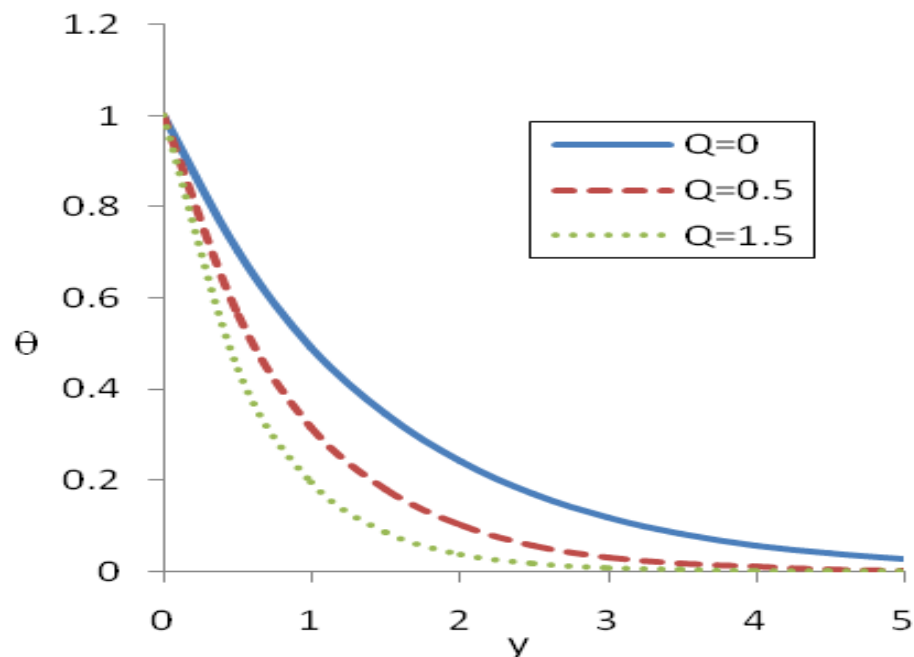
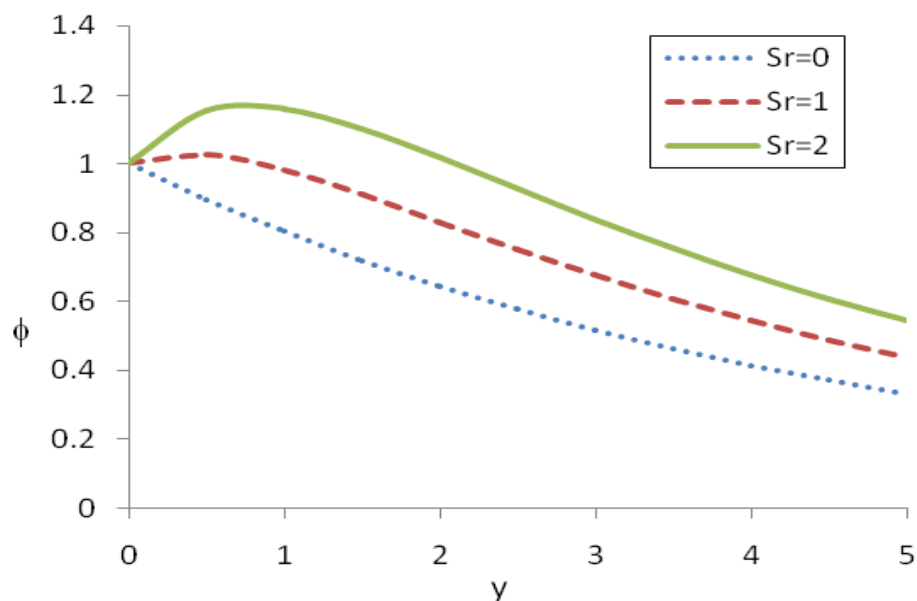


Figure 1: Velocity  $u$  versus  $y$  for  $Pr = 0.71$ ,  $Sc = 0.22$ ,  $G_r = 4.0$ ,  $G_m = 1.0$ ,  $U_0 = 1.0$ ,  $Q = 1.0$ .



**Figure 2:** Temperature  $\theta$  versus  $y$  for  $Pr = 0.71$ ,  $Sc = 0.22$ ,  $Gr = 4.0$ ,  $G_m = 5.0$ ,  $U_0 = 1.0$ ,  $Sr = 0.5$ .



**Figure 3:** Concentration  $\phi$  versus  $y$  for  $Pr = 0.71$ ,  $Sc = 0.22$ ,  $Gr = 4.0$ ,  $G_m = 1.0$ ,  $U_0 = 1.0$ ,  $Q = 1.0$

#### 4. CONCLUSIONS:

In this paper a discussion on free convection mass transfer flow past a uniformly accelerated porous plate in presence of heat absorption and thermal diffusion is presented. From the present study the following conclusions can be drawn:

- (1) The velocity profile increases with an increase in Soret number and decreases steadily far away from the plate.
- (2) The temperature profile decreases due to an increase in value of heat sink parameter.
- (3) The concentration profile increases as the Soret number increases and gradually decreases far away from the plate.
- (4) The skin-friction increases as  $Sc$  increases up to  $Sc \leq 0.708$  and thereafter decreases when  $Sc \geq 0.709$ .
- (5) The rate of mass transfer gets decrease when  $Sc \leq 0.708$  and after that increases gradually when  $Sc \geq 0.709$ .

#### LIST OF SYMBOLS:

$\bar{C}$ Species concentration	$\bar{T}_{\infty}$ Temperature in the free stream
$C_p$ Specific heat at constant pressure	$\bar{U}$ Free Stream velocity (dimensional)
$\bar{C}_w$ Species concentration at the plate	$U_0$ Free Stream velocity (non-dimensional)
$\bar{C}_{\infty}$ Species concentration in the free stream	$V_0$ Suction velocity
$D_M$ Co-efficient of mass diffusion	$(\bar{u}, \bar{v})$ Velocity components (dimensional)
$D_T$ Co-efficient of thermal diffusion	$(u, v)$ Velocity components (non- dimensional)
$g$ Acceleration due to gravity	$(\bar{x}, \bar{y})$ Cartesian Co-ordinate (dimensional)
$G_m$ Grashof number for mass transfer	$(x, y)$ Cartesian Co-ordinate (non-dimensional)
$G_r$ Grashof number for heat transfer	
$k$ Thermal conductivity	<b>Greek Symbols:</b>
$Nu$ Nusselt number	$\beta$ Co-efficient of volume expansion for thermal expansion
$Pr$ Prandtl number	$\beta^*$ Co-efficient of volume expansion for mass expansion
$Q$ Heat sink parameter(non-dimensional)	$\rho$ Density of the fluid
$Q_0$ Heat sink parameter(dimensional)	$\theta$ Non dimensional temperature
$Re$ Reynolds number	$\nu$ Kinematic Co-efficient of viscosity
$Sc$ Schmidt number	$\phi$ Non dimensional Species Concentration
$Sh$ Non-dimensional Sherwood number	$\tau$ Non- dimensional skin friction
$Sr$ Soret number	
$\bar{T}$ Fluid temperature	
$\bar{T}_w$ Temperature at the plate	

#### REFERENCES:

- [1] Afify, A.A, Similarity solution in MHD effects of thermal diffusion and diffusion-thermo on free convective heat and mass transfer over a stretching surface considering suction or injection, communication in Non-linear Science and numerical simulation, 14(2009), 2202-2214.
- [2] Ahmed, N., Sengupta, S., Thermo-diffusion and diffusion-thermo effects on a three -dimensional mhd mixed convection flow past an infinite vertical porous plate with thermal radiation, J. of Magnetohydrodynamics, 47(2011), 41-60.

- [3] Chamkha, A. J., MHD flow of a numerical of uniformly stretched vertical permeable surface in the presence of heat generation/absorption and a chemical reaction, Int. Comm. Heat Mass Transfer, 30(2003), 413–22.
- [4].Dursunkaya, Z., Worek, W.M, Diffusion-Thermo and Thermo-Diffusion effects in transient and steady natural convection from vertical surface, International Journal of heat and mass transfer, 35(1992), 2060-2065.
- [5] Kafoussias, N. G, Willams, E. M., Thermal-Diffusion and Diffusion-thermo effects on mixed free-forced convective and mass transfer boundary layer flow with temperature dependent viscosity, International Journal of Engineering Science, 33(1995), 1369-1384.
- [6] Martynenko, O. G., Berezovsky, A. A and Sakovishin, Yu. A., Laminar free convection from a vertical plate, Int. J. Heat Mass Transfer, 27(1984), 869–881.
- [7] Perdikis, C. P, and Takhar, H. S., Free convection effects on flow pas moving vertical infinite porous plate. Astrophys. Space Science, 125(1) (1986), 205–209.
- [8] Rahman, M. M. and Sattar, M. A., MHD free convection and mass transfer flow with oscillatory plate velocity and constant heat source in a rotating frame of reference, Dhaka Univ. J. Sci., 9(1) (1999), 63-73.
- [9] Raptis, A. and Kafoussias, N. G, Magnetohydrodynamic free convection flow and mass transfer through porous medium bounded by an Infinite vertical porous plate with constant heat flux, Can. J. Physics, 60(1982), 1725-1729.
- [10] Renuka, S. , Kishan, N. , Rao, J., Anand, Finite difference solution of unsteady MHD free convective mass transfer flow past an infinite vertical porous plate with variable suction and Soret effect, International Journal of Petroleum Science and Technology, 3(2009), 43-50.
- [11] Soundalgekar, V. M., Free convection effects on Stokes problem for a vertical plate, J. Heat Transfer, ASME, 99(c) (1977), 499–501.
- [12] Yih, K., A Free convection effect on MHD coupled heat and mass transfer of a moving permeable vertical surface, Int. comm. heat mass transfer, 26( 1999), 95-104.

\*\*\*\*\*